


PRODUCT CATALOG

TIRE CLAMP



Tyre Clamp

HELI



7-1 Sideshifting Tyre Clamp 39




7-2 Revolving Tyre Clamps 40

Introduction:

HELI Tyre Clamps offer safe and efficient handling worldwide for moving or stacking tyres. No matter what size, weight or type of tyres you're handling, HELI has the great attachment designed to match your product.

Sideshifting Tyre Clamp

HELI

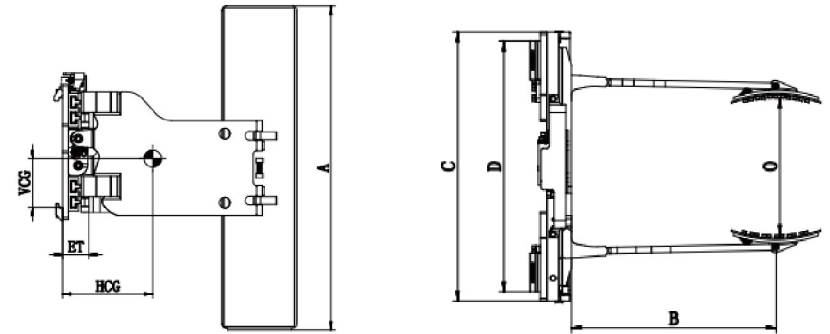

Capacity @ Load Center	Catalog Order NO.	Mounting Class	Clamping Range	Opening Range	Arm Height	Arm Length	Frame Width	Effective Thickness	Vertical Center of Gravity	Horizontal Center of Gravity	Weight	Available Forklift
Kg @ mm			(mm)	O(mm)	A(mm)	B(mm)	C(mm)	ET (mm)	VCG (mm)	HCG (mm)	(kg)	(t)
1000@680	LT10G-A1	II	580-1360	500-1680	1200	680	1040	122	184	331	540	1-2.5t
1000@680	LT10G-B1	III	580-1600	500-1680	1200	800	1040	127	230	399	625	3-4.5t

Notes:

1. Forklift trucks need to add 2 sets of oil lines;
2. Please obtain the actual comprehensive bearing capacity from the forklift manufacturer;
3. The effective clamping range is the recommended value of the actual size of the goods in the width direction.

Features:

1. Reduced Damage
 - With two-way hydraulic lock to achieve two-way hydraulic self-lock;
 - Clamp arms adopt high-strength steel plate to reduce damage.
2. Fast Handling
 - 360° rotation to quickly transition to and from bilge position;
 - Worm arm adopts involute gear to improve clamp arm speed.
 - Side shift function, easy to operate, and good vision
3. Excellent Durability
 - With large modulus slewing bearing to achieve high-strength capacity;
 - Highly durable rotator parts to extend service life.

